

24V TAGRA® PROFESSIONAL LED DRIVER, IP20, 200W


| SKU: TAG24V200W

tagra®



 tagra-lighting.co.uk

 0161 442 1180

 orders@tagra-lighting.co.uk

FEATURES & BENEFITS

- High Cost Performance
- SELV
- Open Circuit Protection
- Short Circuit Protection
- Overload Protection
- Over Temperature Protection
- Compliance to ERP directive
- Lifetime 30,000 Hours

24V

IP20



WHITE

SELV



TECHNICAL INFORMATION



Specifications

| | | |
|--------------|---------------------|--------------|
| Output | Start Up Time | < 0.5secs |
| | Output Voltage | 24V +/- 5% |
| | Output Current | 0 - 8.33A |
| | Output Voltage Wave | 300mV |
| | Output Overload | Yes |
| Input | Input Voltage | AC200-240V |
| | Input Frequency | 50/60Hz |
| | Input Current | < 0.5A |
| | Input Power | < 220W |
| | Efficiency | > 93% |
| | Standby | < 0.21W |
| | Inrush Current | < 75A |
| Power Factor | > 0.9 | |
| Environment | Operating Temp. | -20°C~45°C |
| | Relative Humidity | 45%~85% RH |
| | Max. Case Temp. | 90°C |
| | Lifetime | 30,000 Hours |
| | Working Noise | Yes |

| | | |
|-------------------|-----------------------------|------------------------------|
| Mechanical | Case Material | Plastic |
| | Mounting | Independent |
| | Insulation Type | Class II |
| | IP Rating | IP20 |
| | Input Cables | H05VVH2-F 1.0mm ² |
| | Output Cables | H05VVH2-F 1.0mm ² |
| | Output Cables Length | Max. 2 Metres |

| | | |
|-------------------|-------------------------|-----|
| Protection | Open Circuit | - |
| | Overload | Yes |
| | Short Circuit | Yes |
| | Over Temperature | Yes |
| | Over Voltage | Yes |
| | Auto Recovery | Yes |
| | Latch Off | Yes |

| | | |
|-------------------------|-----------------|--------------------------------|
| Safety & EMC | Safety | IEC61347-1 IEC61347-2-13 |
| | Harmonic | EN62000-3-2 Class C |
| | EMI | EN55015 |
| | EMS | EN62000-4-2,3,4,5,6 EN61547 |

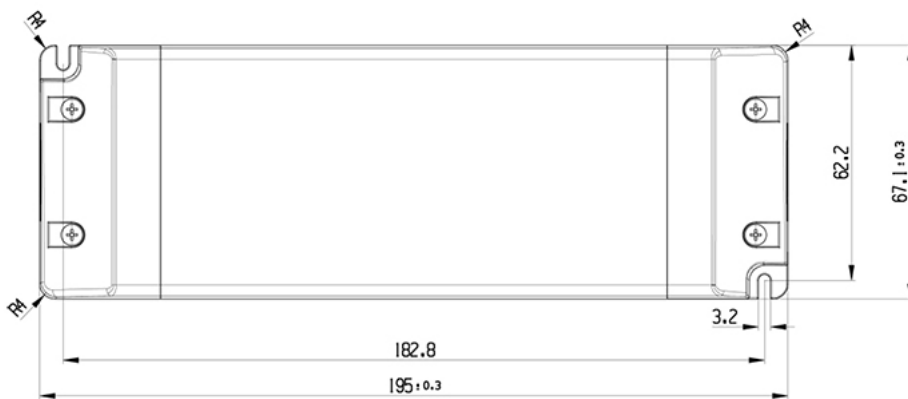

DIMENSIONS