

24V TAGRA® PROFESSIONAL LED DRIVER, IP67, 320W

| SKU: TAG24V320WIP67

tagra®



 tagra-lighting.co.uk

 0161 442 1180

 orders@tagra-lighting.co.uk

FEATURES & BENEFITS

- High Cost Performance
- SELV
- Open Circuit Protection
- Short Circuit Protection
- Overload Protection
- Over Temperature Protection
- Compliance to ERP directive
- Lifetime 50,000 Hours

24V

IP67



SELV



TECHNICAL INFORMATION


Specifications

Output	Start Up Time	< 0.5secs
	Output Voltage	24V +/- 5%
	Output Current	0 - 13.4A
	Output Voltage Wave	500mV
	Output Overload	Yes
Input	Input Voltage	AC200-240V
	Input Frequency	50/60Hz
	Input Current	< 2.0A
	Input Power	< 360W
	Efficiency	> 90%
	Standby	< 1.2W
	Inrush Current	< 100A
Power Factor	> 0.9	
Environment	Operating Temp.	-40°C~50°C
	Relative Humidity	45%~95% RH
	Max. Case Temp.	90°C
	Lifetime	50,000 Hours
	Working Noise	Yes

Mechanical	Case Material	Aluminium
	Mounting	Independent
	Insulation Type	Class I
	IP Rating	IP67
	Input Cables	H05rn-F 3x1.0mm ²
	Output Cables	SJTW
	Output Cables Length	Max. 2 metres

Protection	Open Circuit	-
	Overload	Yes
	Short Circuit	Yes
	Over Temperature	Yes
	Over Voltage	Yes
	Auto Recovery	Yes
	Latch Off	Yes

Safety & EMC	Safety	IEC61347-1 IEC61347-2-13
	Harmonic	EN61000-3-2 Class C
	EMI	EN55015
	EMS	EN61000-4-2,3,4,5,6 EN61547

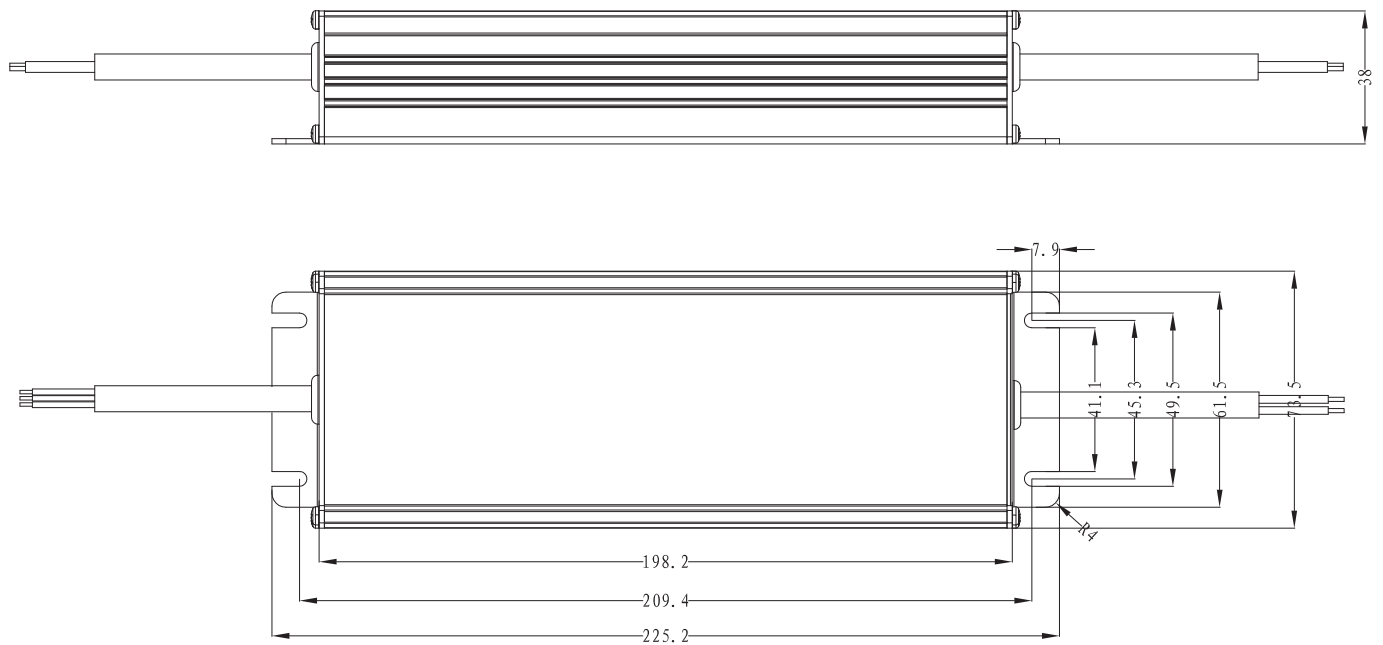

DIMENSIONS